


Alkaline-Manganese Dioxide Battery

LR6 Size: AA

5.5 m <u>m</u> Max.	14.5 mm 13.5 mm 1.0 mm MIN. (+) 50.5 mm 49.2	
	<u>(-)</u>	
Dimensions shown are IEC standards		

Nominal Voltage:	1.5 V
Nominal Internal Impedance:	180 m-ohm @ 1kHz
Average Weight:	24 gm (0.84 oz.)
Volume:	8.4 cm ³ (0.51 in. ³)
Terminals:	Flat
Operating Temperature Range:	-20°C to 54°C
IEC:	LR6

TYPICAL DISCHARGE CHARACTERISTICS AT 21°C

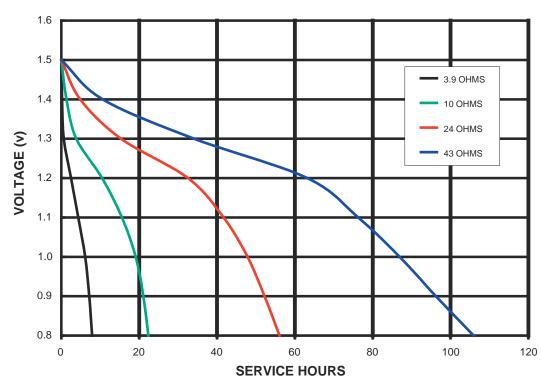

Duracell Battery Company Berkshire Corporate Park Bethel, CT 06801 U.S.A.

^{*} Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.